



TRO TROF W SPECIFICATIONS

MADE IN
CANADA

SUSTAINABLE

LIGHTWEIGHT

ROBUST

ADAPTABLE

Product Information


Weight	16.3kg
External Dimensions	275H, 387W, 1075L
Internal Dimensions	200H, (MV) 187.5W, (FO) 98.5W, 1000L
Material	High Density Polyethylene
Fire Retardant Characteristics	Meets NFPA requirements for rail in non-enclosed environment
Manufacturing Process	Injection moulded
Bend / Tilt Characteristics	Designed into the product for ease of install

Product Benefits

Lightweight	Higher installation rates / lower installation costs
Material Handling	Reduced site & HiRail handling
Strength	Durable and long-lasting in the rail environment
Security	Anti-vandal and anti-theft features
Quality	ISO 9001 injection moulding process
Environmentally Friendly	Recycled polymer material / off-cut recovery scheme
Product Interfaces	Interfaces with other TroTrof products as well as existing concrete trough products

Health, Safety and Environment Comparison

Tro Trof W	Concrete Trough
One person lift	Three person lift
Cut using standard tools	Cut with a concrete saw
No dust or noise produced	Dust and noise produced
Smooth surface finish	Abrasive surface finish
Medium carbon footprint	High carbon footprint
Recyclable	Cannot be recycled

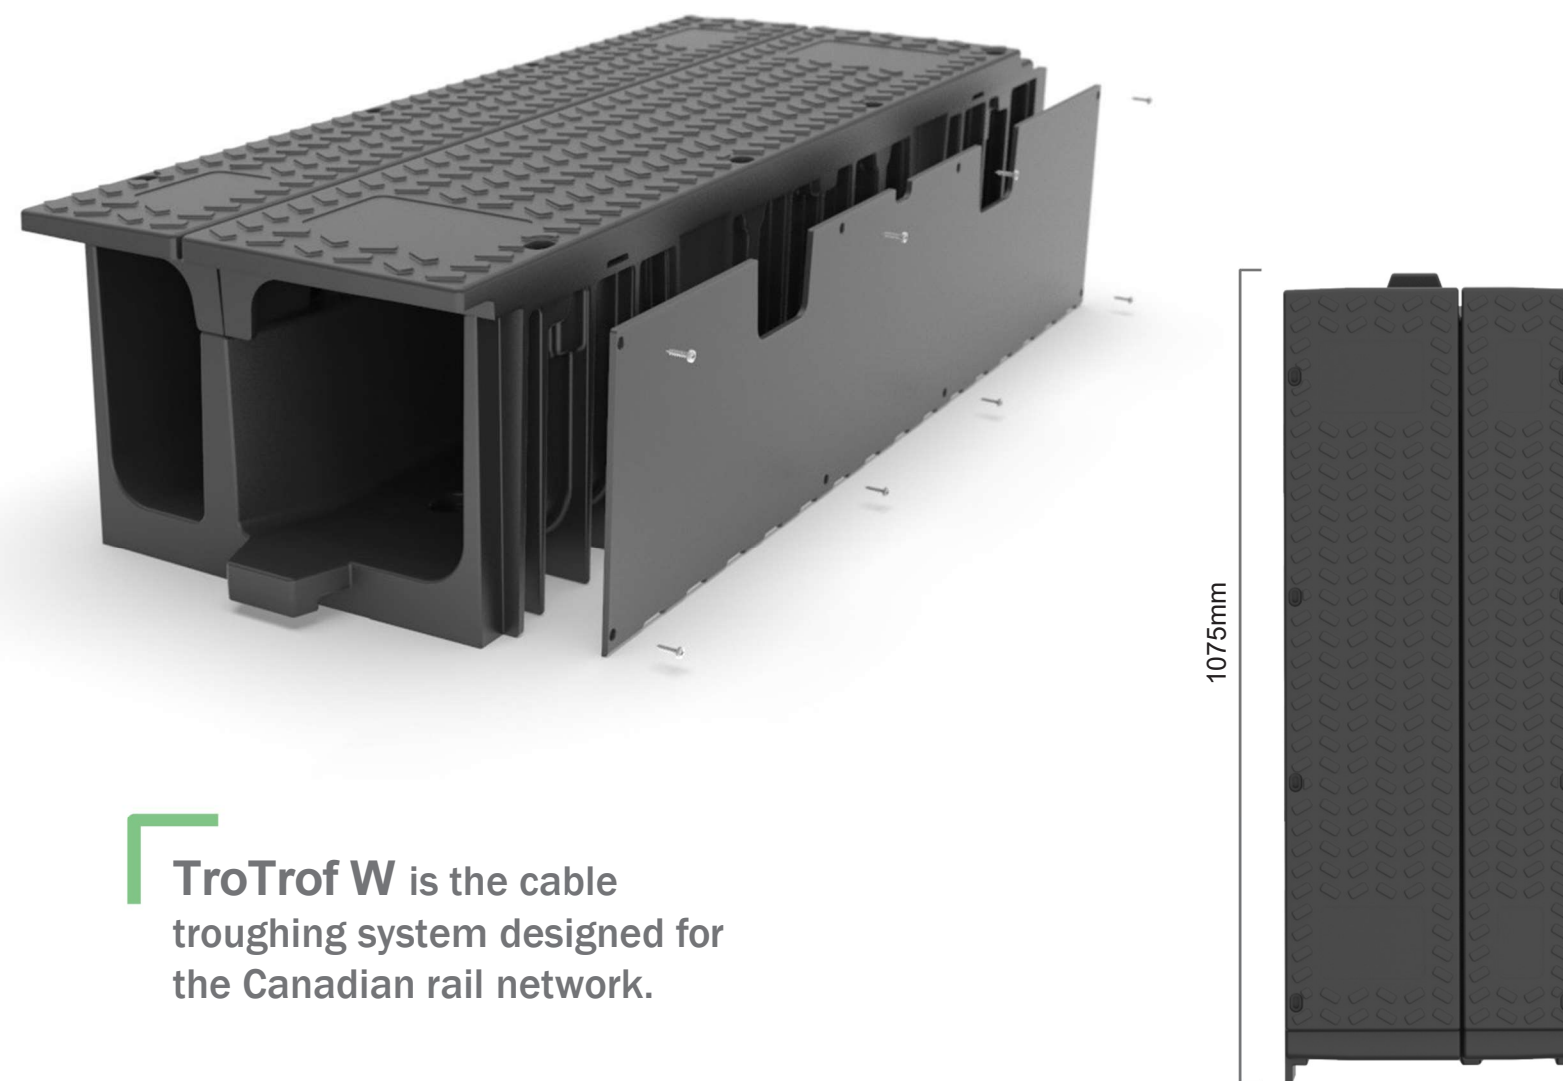

TroTrof W is the cable troughing system designed for the Canadian rail network.

